

549, 956



(10) International Publication Number
WO 2004/085848 A1

PCT


- (51) **International Patent Classification⁷:** **F04B 39/00**,
B29C 45/14, F01N 7/18
- (21) **International Application Number:**
PCT/BR2004/000039
- (22) **International Filing Date:** 25 March 2004 (25.03.2004)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
PI 0300905-0 28 March 2003 (28.03.2003) BR
- (71) **Applicant (for all designated States except US):** EM-
PRESA BRASILEIRA DE COMPRESSORES S.A. -
EMBRACO [BR/BR]; Rua Rui Barbosa, 1020, Joinville
- SC 89219-901 (BR).
- (72) **Inventors; and**
- (75) **Inventors/Applicants (for US only):** VOLLRATH,
Ingwald [BR/BR]; Rua Olavo Bilac, 85, Joinville - SC
89239-100 (BR). HILLE, Cláudio, Roberto [BR/BR];
Rua Fides Huhn, 125, Joinville - SC 89217-170 (BR).
- (74) **Agents:** ARNAUD, Antonio M.P. et al.; Rua José Bonifá-
cio, 93 - 9th floor, São Paulo - SP 01003-901 (BR).
- (81) **Designated States (unless otherwise indicated, for every
kind of national protection available):** AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BW, BY, BZ, CA, CH, CN, CO,
CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB,
GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG,
KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG,
MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH,
PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) **Designated States (unless otherwise indicated, for every
kind of regional protection available):** ARIPO (BW, GH,
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), Euro-
pean (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR,
GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).
- Published:**
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.*

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: SUCTION MUFFLER FOR A HERMETIC COMPRESSOR

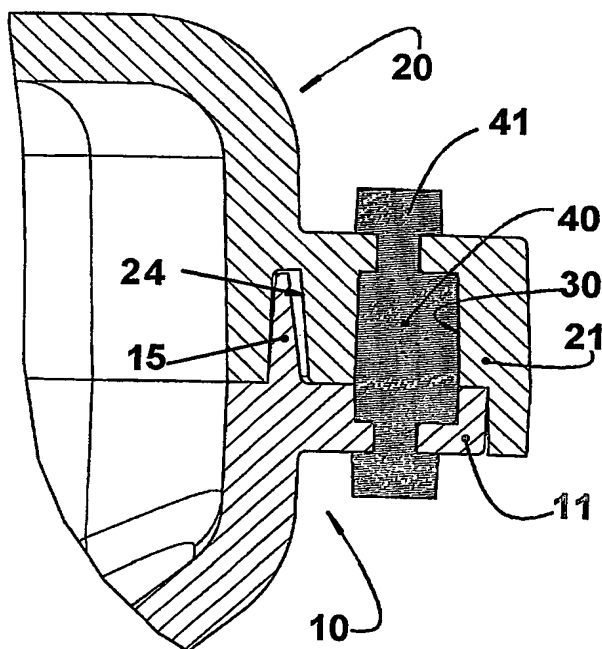

(57) Abstract: A system for closing a suction muffler of a hermetic compressor, said suction muffler comprising: a hollow base (10); a cover (20) to be coupled to the hollow base (10), said parts defined by the hollow base (10) and the cover (20) including respective mutually seatable peripheral flanges (11, 21), which are shaped to define, jointly, an internal channel (30) extended along at least part of the circumferential extension of said peripheral flanges (11, 21) and which is opened to the opposite external faces of the latter by means of throughbores (13, 23) axially aligned to each other in pairs, each pair of throughbores (13, 23) maintaining a circumferential distance in relation to an adjacent pair of throughbores (13, 23), the throughbores (13, 23) of each pair and the internal channel (30) being filled with a gasket (40) of injected material, which projects outwardly from the throughbores (13, 23) so as to define an axial lock portion (41).

WO 2004/085848 A1